


GD18B SERIES - GD18B80S

LED Linear Track Light



Accessory & Adapter

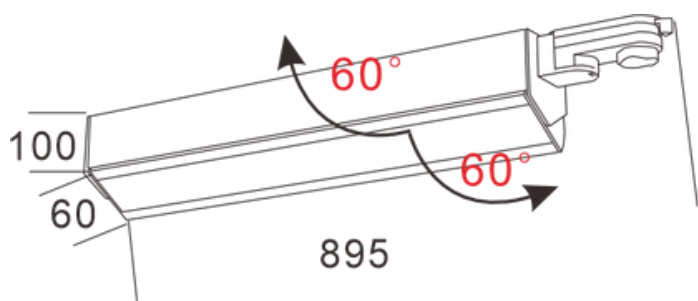

White



Gold



3-phase (4 wires)

General Data

Color: matte black / matte white

Installation Method: track mounted

Place of application: indoor

Technical Data

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50-60

Power [W]: 80

Class of protection against electric shock: II

Light source: LED SMD

Luminous flux [lm]: 6800lm

Color temperature: 3000K/4000K/5000K

Colour consistency in McAdam ellipses: ≤ 3

Colour rendering index: 90

Service life [h]: 50000

Number of on/off cycles: ≥ 30000

Lighting angle [°]: 100

Diffuser: PC

Light Shape: rectangle

LED Inside Dimension: 5050

Luminous efficiency of the lamp [lm/W]: 85

Housing material: aluminum alloy

The fixture is movable vertically [°]: 60

IP class: 20

Size [mm]: 895*60*100

Operating temp. [°C]: -25~50

Storage temp. [°C]: -25~45

Additional Information

Warranty: 5 years

Certification: CE, RoHS