


ANGEL SERIES - GD20B75A

LED Track Panel Light



CCT & Power selection

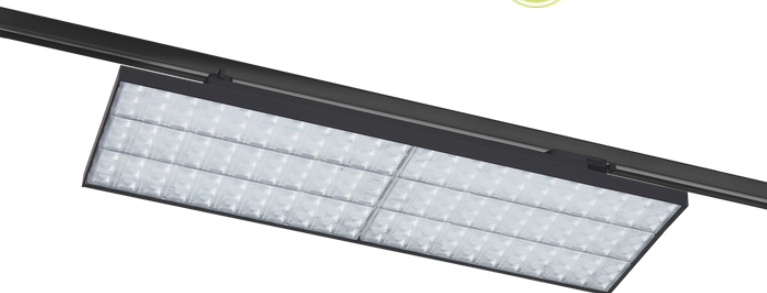


CCT: ADJUST COLOR TEMPERATURE

ON-OFF: ADJUST WATTAGE

Accessory



HONEY COMB




15° Asymmetric




25° Dual asymmetric




35° Dual asymmetric



60°



90°

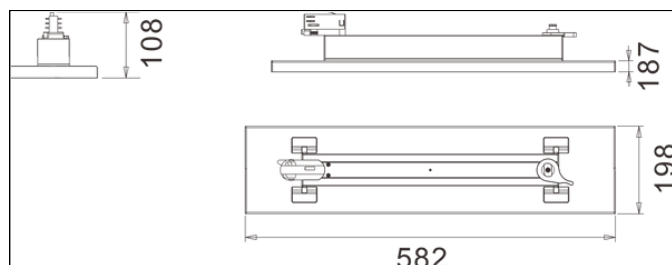

General Data

Color: matte black / matte white

Installation method: Track mounted

Place of application: Indoor

Dimming option: Non dim / TRIAC / 0-10V / DALI

Track system: 2 wires 1 phase / 3 wires 1 phase / 4 wires 3 phases

Size [mm]: 582*198*108mm

Technical Data

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50-60

Power [W]: 70

Class of protection against electric shock: II

Light source: LED SMD

Luminous flux [lm]: 9750lm

Color temperature: 3000K / 4000K / 5000K

Colour consistency in McAdam ellipses: ≤3

Colour rendering index: 90

Service life [h]: 50000

Number of on/off cycles: ≥30000

Lighting angle [°]: 60/ 90/ 15° Asymmetric/

25° Dual asymmetric/ 35° Dual asymmetric

Luminous efficiency of the lamp [lm/W]: 140

Housing material: aluminum alloy

The fixture is movable horizontally [°]: 355

IP class: 20

Additional Information

Warranty: 5 years

Certification: CE, RoHS